

Strain Gage Amplifiers

Series AMP-SG-M1

- Single channel miniature amplifier
- Highly accurate bridge excitation
- Provides high level voltage signal output
- Externally adjustable shunt resistance
- Externally adjustable gain
- Precision low noise differential amplifier
- Remote bridge excitation On/Off capability
- Remote shunt calibration capability




Description

Michigan Scientific's *AMP-SG-M1 Strain Gage Amplifiers* are ideal for applications where signal conditioning is needed and space is limited. They are designed to provide signal amplification prior to passing the signal through a slip ring. Superior data accuracy is achieved by locating the signal amplifier on the rotating side of the slip ring. This configuration greatly improves signal quality because the amplifier is located closer to the sensor which reduces errors due to long lead wires, connector resistance variations, and electro-magnetic interference.

These strain gage amplifiers incorporate a precision low drift bridge excitation supply, a stable differential amplifier, and a remotely activated shunt calibration resistor for system span verification. Each amplifier provides strain gage bridge excitation and amplification for one channel. Multiple channel configurations are available.

Drawing

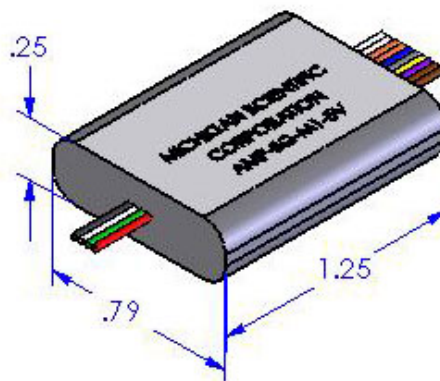

C586004S_M1.PSD

8500 Ance Road
Charlevoix, MI 49720
Tel: 231-547-5511
Fax: 231-547-7070
01-5-22
Rev. A

MICHIGAN SCIENTIFIC
corporation
<http://www.michsci.com>
Email: miscinfo@michsci.com

321 East Huron Street
Milford, MI 48381
Tel: 248-685-3939
Fax: 248-685-5406

Strain Gage Amplifiers

Specifications

| PARAMETER | | SPECIFICATION |
|---------------------------|------------------------|--|
| BRIDGE EXCITATION | | |
| Type | | DC Constant Voltage (Bipolar Excitation) |
| Magnitude | | AMP-SG-M1-5 ± 2.5 V (5 Volts total) AMP-SG-M1-10 ± 5.0 V (10 Volts total) |
| Accuracy | | 0.40% |
| Temperature Coefficient | | 0.0005 %/°C Max (0.00028 %/°F) |
| Current Limit | | AMP-SG-M1-5 42 mA AMP-SG-M1-10 84 mA |
| REMOTE CALIBRATION | | |
| Shunt Resistance | internal value | 100 k Ω and 1 M Ω |
| | external value | 100 k Ω - 1 M Ω |
| Shunt Accuracy | @ 100 k Ω | 0.1% |
| | @ 1 M Ω | 0.1% |
| GAIN | | |
| Range | with external jumper | 100 & 2000 V/V |
| | with external resistor | 100 - 2000 V/V |
| Accuracy | @ 25°C, Gain =100 | ± 0.05 % typ (± 0.50 %max) |
| | @ 25°C, Gain =1000 | ± 0.50 %typ (± 1.0 %max) |
| Temperature Coefficient | | 0.0025 %/°C (0.0014 %/°F) |
| OUTPUT | | |
| Range | | ± 10 V max |
| Capacitive Load | | 1000 pF max |
| VOLTAGE OFFSET | | |
| | | Referred to input of amplifier |
| Initial | @ 25°C | ± 10 μ V typ (± 50 μ V max) |
| Temperature Stability | | ± 0.1 μ V / °C typ (± 0.25 μ V / °C max) |
| Time Stability | | ± 0.1 μ V / month |
| DC CMRR | | 160 dB |
| Noise | rti 0.01 - 10 Hz | 0.7 μ V p-p |
| DYNAMIC RESPONSE | | |
| Frequency Response -3dB | @ Gain=1000 | 20 kHz |
| | @ Gain=100 | 20 kHz |
| Slew rate | | 4 V/ μ s |
| Settling Time to 0.01% | @ Gain=100 | 9 μ s |
| POWER REQUIREMENTS | | |
| Voltage | @ 25°C | ± 15 Vdc |
| Current | | ± 15 mA plus Bridge Load (+15 mA additional during shunt calibration) |
| ENVIRONMENT | | |
| Specification | | -40 to +85°C (-40 to +185°F) |
| Operation | | -40 to +125°C (-40 to +257°F) |
| MECHANICAL | | |
| | | AMP-SG-M1 |
| Weight | | 14.17 g (0.50 oz) |
| Overall Length | | 31.75 mm (1.250 in) |
| Overall Height | | 6.35 mm (0.250 in) |
| Overall Width | | 20.32 mm (0.800 in) |