


Weatherproof Tubular “Thin” Slip Ring Assembly

Model B4-2WT

- Thin unit - only 0.79”[20 mm] thick
- 4 circuit weatherproof slip ring
- Non-contact labyrinth seals - seals will not wear out
- Mounts on shafts up to 2” [50.8 mm] in diameter
- Permanently lubricated bearings
- Rugged stainless steel construction
- Instrumentation quality rings and brushes

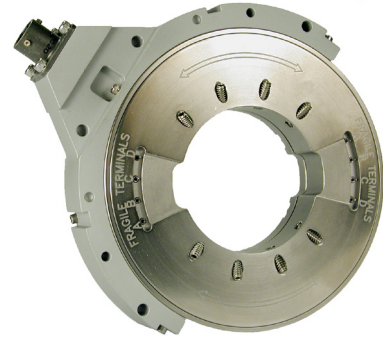

Description

Michigan Scientific's *B4-2WT Thin Weatherproof Slip Ring Assembly* is ideal for applications that require the slip ring to be sealed and mounted directly on a rotating shaft. Typically used for automotive drive shaft measurement applications, this model employs specially designed seals that provide weatherproof protection from water, mud, snow, dust, and other contaminants. It is designed to fit on shafts up to 2” in diameter and make electrical connection to strain gages, thermocouples, or other sensors that have been installed on rotating equipment. The slip ring brushes and rings are made of precious metals which minimize noise and enable the assemblies to be used for low level instrumentation signals.

Connections are made through solder terminals located on the slip ring rotor and a connector on the slip ring stator. A lower profile terminal plate can be used to replace the stator connector. The compact design of this slip ring make it ideal for applications where limited space is available.

Specifications

Circuits	4
Current Capacity per Circuit	1A
Temperature Range	-40°F to 250°F (-40°C to 121°C)
RPM Rating	7000 RPM
Maximum Peak Noise*	0.1Ω
Width	0.790 (20.066 mm)
Weight	2.56lbs (1.16 kg)
Output Connector	Bendix PT02E-8-4P
Mating Connector	Bendix PT06E-8-4S (SR)
* Resistance variation across slip ring contact.	


8500 Ance Road
Charlevoix, MI 49720
Tel: 231-547-5511
Fax: 231-547-7070
01-3-22
Rev. A

MICHIGAN SCIENTIFIC
corporation
<http://www.michsci.com>
Email: msscinfo@michsci.com

321 East Huron Street
Milford, MI 48381
Tel: 248-685-3939
Fax: 248-685-5406

Weatherproof Tubular "Thin" Slip Ring Assembly

B4-2WT Configuration

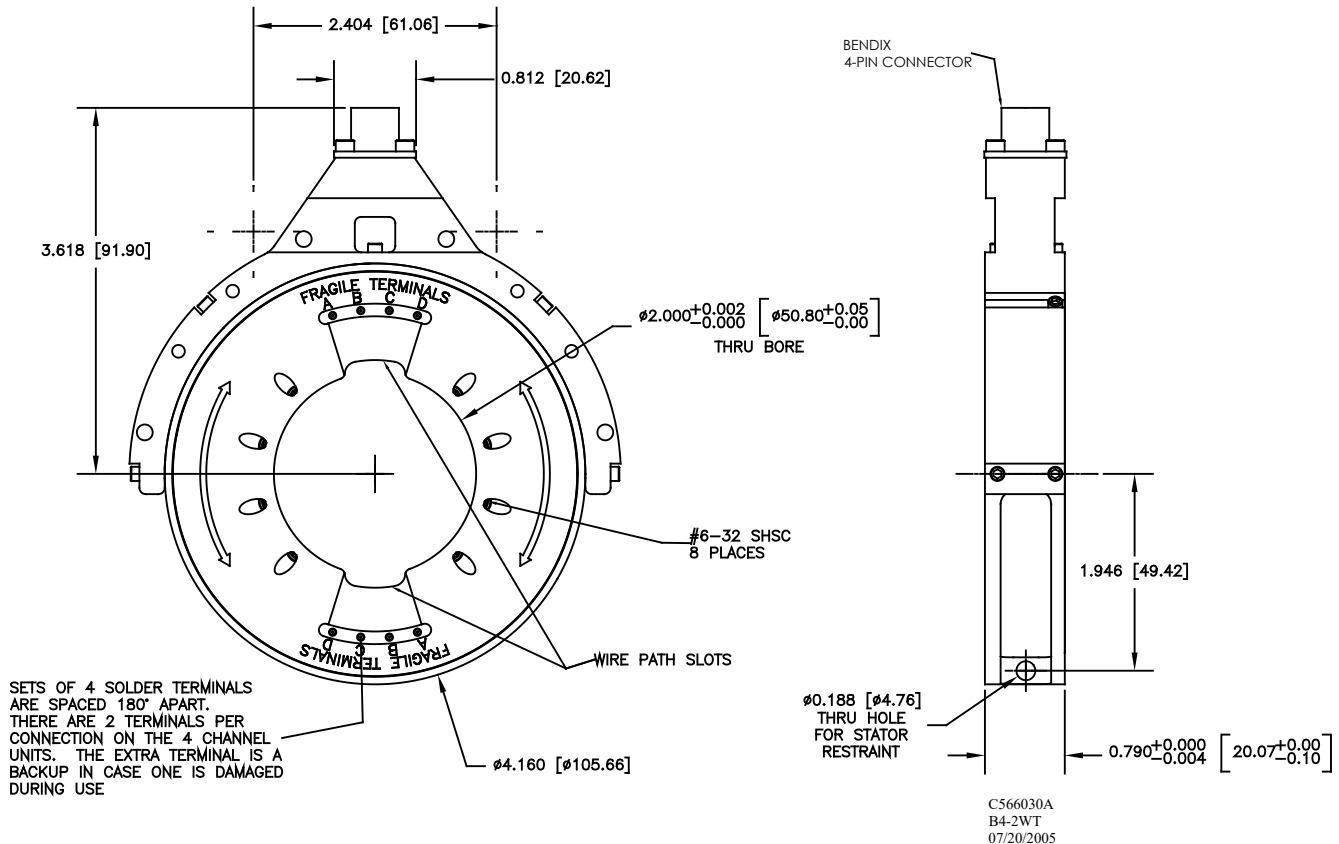

Mounting

The *B4-2WT Thin Slip Ring Assembly* can be easily mounted on a shaft. An additional bushing is required when using the slip rings on shafts smaller than 2" in diameter. The slip ring rotor is configured with eight #6-32 set screws used for mounting. Signal wires from the sensors can be routed along the outside diameter of the shaft. A wire path slot is machined into the slip ring rotor, enabling wires to be routed under the slip ring and to the solder terminals.

Ordering Options

Special units are available for high speed applications that continuously exceed 7000 RPM. Contact Michigan Scientific for further information.

The slip ring rotates in both clockwise and counterclockwise directions. Mating Bendix connector included. For information regarding slip ring accessories, refer to Tech Note 107..

8500 Ance Road
Charlevoix, MI 49720
Tel: 231-547-5511
Fax: 231-547-7070
01-3-22
Rev. A

MICHIGAN SCIENTIFIC
corporation
<http://www.michsci.com>
Email: mcsinfo@michsci.com

321 East Huron Street
Milford, MI 48381
Tel: 248-685-3939
Fax: 248-685-5406