


C252018A

DATE	BY	REVISION	LOC.

AMPHENOL  
JT06RE-14-35S(SR)  
PLUG & STRAIN RELIEF.


THIS CONNECTOR  
REQUIRES A SET OF  
CONNECTOR TOOLS.

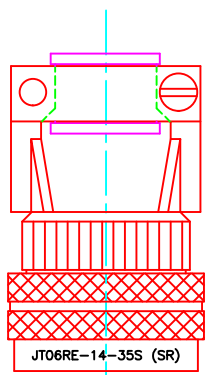

JT06RE-14-35S (SR)

AMPHENOL  
JT02RE-14-35P  
RECEPTACLE

2 HOLES  
4-40 THREAD  
0.25 MIN THD





JT02RE-14-35P

0.906

0.755

3 THROUGH HOLES ON 1.700 B.C. AT 120° SPACING.  
HOLES 0.166 Ø FOR 8-32 OR M4 SCREW CLEARANCE.

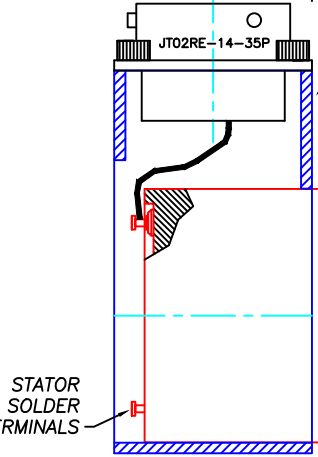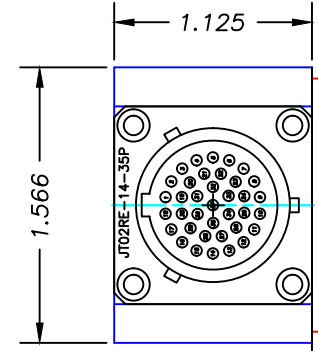


C574154B  
CONNECTOR  
BRACKET

36 STATOR  
SOLDER  
TERMINALS

36 ROTOR SOLDER TERMINALS

3.68 AS SHOWN, WITH CONNECTOR  
BRACKET 0.1 ABOVE STATOR TERMINALS



1.441  
Ø

THE CONNECTOR BRACKET IS GLUED ONTO THE SLIP RING STATOR  
WITH AN ADHESIVES SUCH AS HARDMAN 4002 EPOXY  
OR A LOCTITE RETAINING COMPOUND.

MODEL SR36M SLIP RING & C574154B CONNECTOR  
BRACKET & AMPHENOL CONNECTORS

WIRING DIAGRAM IS SR36M C252017A.DWG

**M**ICHIGAN  
SCIENTIFIC CORPORATION  
08500 ANCE ROAD  
CHARLEVOIX, MI 49720  
PHONE: (231)547-5511 FAX: (231)547-7070

DESIGNED BY: KDL	DATE: 11-4-22	SCALE: 1:1
TITLE: SR36M & C574154B CONNECTOR BRACKET & AMPHENOL JT02RE-14-35S(SR) CONNECTOR		
DRAWING NO.: C252018A		

W:\SLIPRINGS\SR-SERIES\SR36M\C252018A.dwg, 11/4/2022 2:36:11 PM, kdlarsen