C213447A

DATE	BY	REVISION	LOC.

REMOVE 4-40 SCREW TO ADD A FEW DROPS OF TYPE F ATF EVERY 20 MILLION REVS

TABS TO ATTACH A TETHER TO PREVENT THE STATOR FROM ROTATING. UNIT TORQUE IS LOW (ABOUT 3 IN-OZ). USE A FLEXIBLE CABLE OR SOFT SPRING, TO MINIMIZE FORCES APPLIED TO THE UNIT'S BEARINGS.

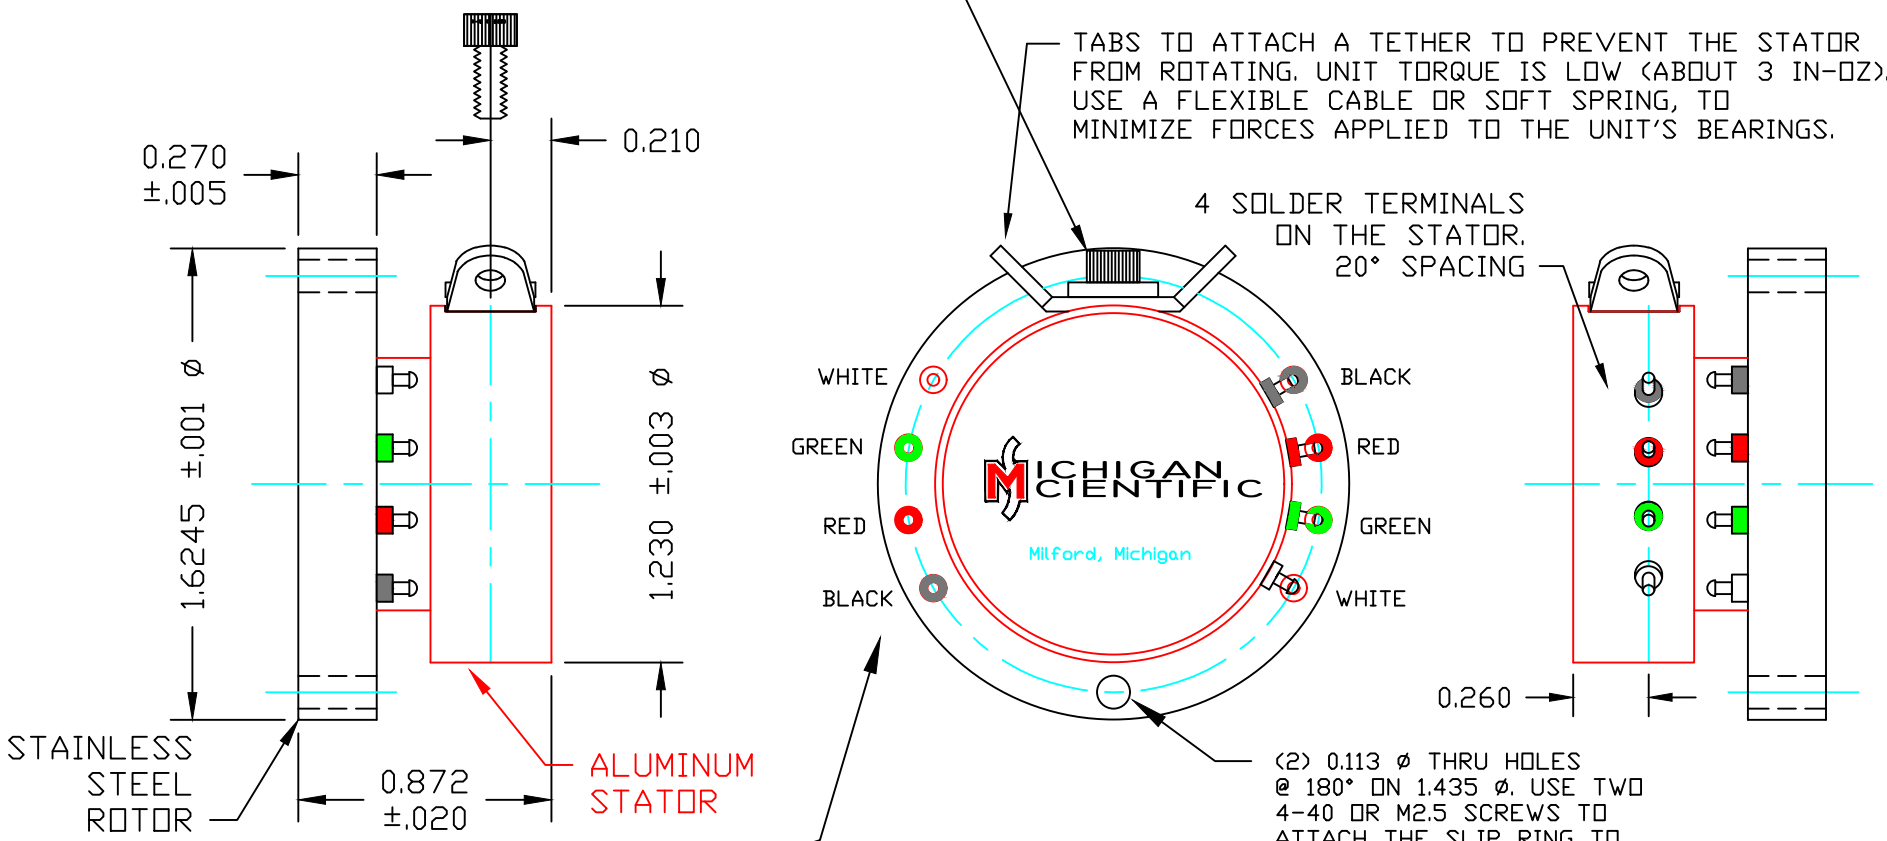

SHORT S SERIES
MODEL SHORT S4/T/LHV
4 SLIP RING CONNECTIONS
LUBRICATION HOLE FOR ADDING ATF

WEIGHT 53 GRAMS (1.9 OZ)

ALL DIMENSIONS IN INCHES

DESIGN MAY CHANGE WITHOUT NOTICE

COPYRIGHT © 2021

MICHIGAN SCIENTIFIC CORPORATION
08500 ANCE ROAD
CHARLEVOIX, MI 49720
PHONE: (231)547-5511 FAX: (231)547-7070

TOLERANCES	DESIGNED BY:	DATE:	SCALE:
.xxxx ±---- .xxx ±--- .xx ±-- ANGLES ±-°--'	KDL	2-7-21	1:1
SURFACE FINISH ---RMS	DRAWN BY: KDL	TITLE: SHORT S4/T/LHV	
	CHECKED BY:	SHT OF SHTS:	SIZE AH
DRAWING NO.: C213447A	MATERIAL: METAL HOUSING		

W:\SLIPRINGS\S-SERIES\SHORTS4\C213447A.dwg, 2/7/2021 1:00:31 PM