


C213644A

DATE	BY	REVISION

TABS TO ATTACH A TETHER TO PREVENT THE STATOR FROM ROTATING. UNIT TORQUE IS LOW (ABOUT 3 IN-OZ). USE A FLEXIBLE CABLE OR SOFT SPRING, TO MINIMIZE FORCES APPLIED TO THE UNIT'S BEARINGS..

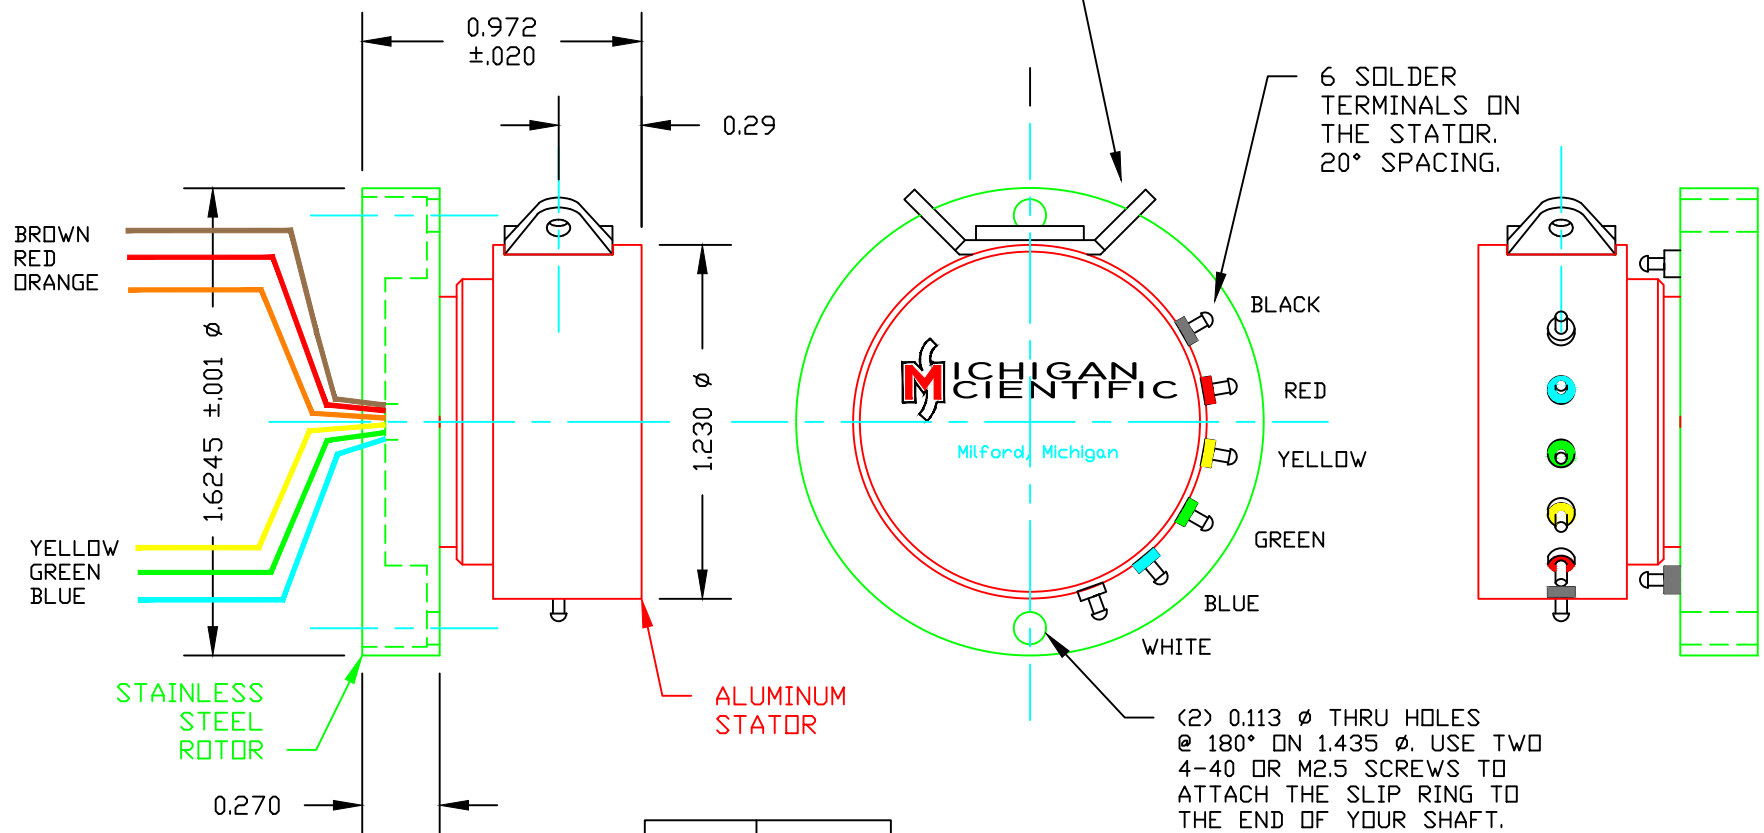

ROTOR WIRE COLOR	STATOR TERMINAL COLOR
BROWN	BLACK
RED	RED
ORANGE	YELLOW
YELLOW	GREEN
GREEN	BLUE
BLUE	WHITE

SHORT S SERIES  
 MODEL SHORT S6/T/N7  
 6 SLIP RING CONNECTIONS

ROTOR WIRES APPROXIMATELY 7 INCHES,  
 30 AWG SOLID WIRE, WITH TEFLON INSULATION

ROTOR IS NOT FILLED WITH BLACK EPOXY.

ROTOR DOES NOT HAVE SOLDER TERMINALS.

WEIGHT 56 GRAMS (2 OZ)

ALL DIMENSIONS IN INCHES

DESIGN MAY CHANGE WITHOUT NOTICE

© 2020

**MICHIGAN SCIENTIFIC CORPORATION**

08500 ANCE ROAD  
 CHARLEVOIX, MI 49720  
 PHONE: (231)547-5511 FAX: (231)547-7070

TOLERANCES .xxxx ±----	DESIGNED BY: KDL	DATE: 11-9-18	SCALE: 1:1
.xxx ±---	DRAWN BY: KDL	TITLE: SHORT S6/T/N7	
.xx ±--	CHECKED BY:	SHT OF SHTS:	SIZE AH
ANGLES ±°---			
SURFACE FINISH ---RMS	DRAWING NO.: C213644A	MATERIAL: METAL HOUSING	

W:\SLIPRINGS\SERIES\SHORTS6\C213644A.dwg, 2/5/2021 4:01:47 PM